




0005G47


## VALVOLA DI RITEGNO A PALLA IN GHISA



| pos. | Denominazione / Part Name | Materiale / Materials        |
|------|---------------------------|------------------------------|
| 1    | Corpo, Body               | EN-GJS-400-15 (Epoxy coated) |
| 2    | Cappello, Bonnet          | EN-GJS-400-15 (Epoxy coated) |
| 3    | Palla, Ball               | Acciaio + NBR / Steel + NBR  |

Diapositiva 1

|                                              |                         |
|----------------------------------------------|-------------------------|
| Pressione nominale, Nominal pressure         | PN 16                   |
| Temperatura di utilizzo, Working temperature | 0° C. / +80° C.         |
| Flangiatura, Flanges drilled                 | EN 1092-2 PN 10 / PN 16 |
| Scartamento, Face to Face                    | EN 558 serie 48         |
| Collaudo, Test                               | EN 12266-1              |
| Norma di riferimento, Reference standard     | EN 16767:2016           |

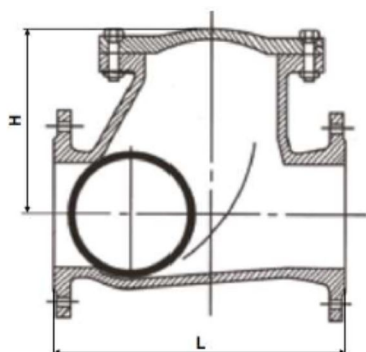

## Dimensioni e prezzo, Size and price

| DN  | Cod. PN 10 | Cod. PN 16 | €. | L   | H   | Kg. |
|-----|------------|------------|----|-----|-----|-----|
| 50  | -          | 4007050    |    | 200 | 106 | 7,5 |
| 65  | -          | 4007065    |    | 240 | 129 | 11  |
| 80  | 400708010  | 4007080    |    | 260 | 146 | 15  |
| 100 | -          | 4007100    |    | 300 | 194 | 21  |
| 125 | -          | 4007125    |    | 350 | 207 | 32  |
| 150 | -          | 4007150    |    | 400 | 240 | 47  |
| 200 | 400720010  | 4007200    |    | 500 | 322 | 87  |
| 250 | 400725010  | 4007250    |    | 600 | 388 | 140 |
| 300 | 400730010  | 4007300    |    | 700 | 458 | 198 |