




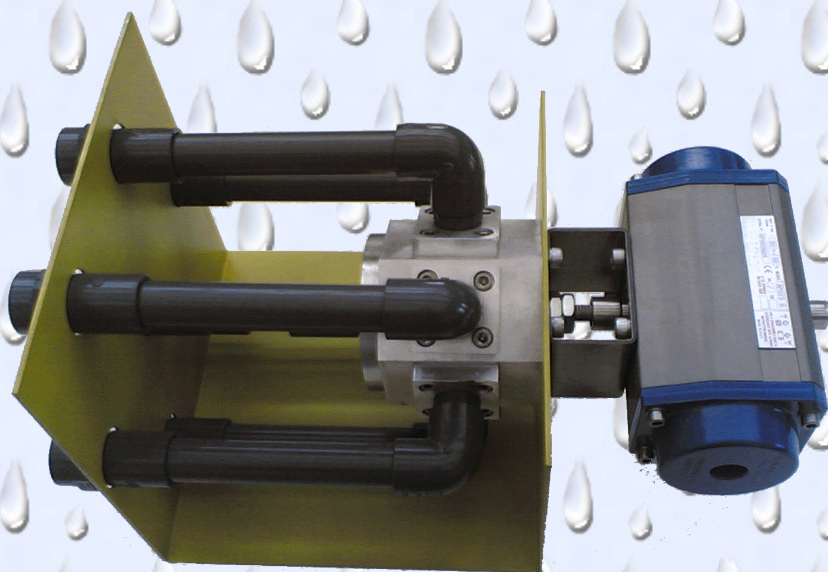


DEVIATORE A 6-12 VIE





- Passaggio totale
- Attacchi filettati o a richiesta
- Deviatore a sfera
- Guarnizioni in PTFE
- Tubi e raccordi in PVC
- Attuatore elettrico con comando diretto della zona

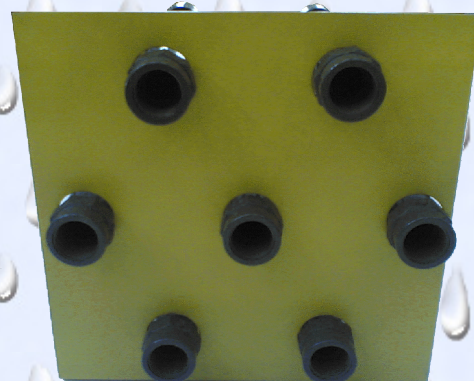

ADD Srl - Via del Lavoro, 15 - 38060 NOMI (TN)
Tel.0464830183 - Fax.0464830456
email:addsrl@tin.it - URL: www.add.135.it

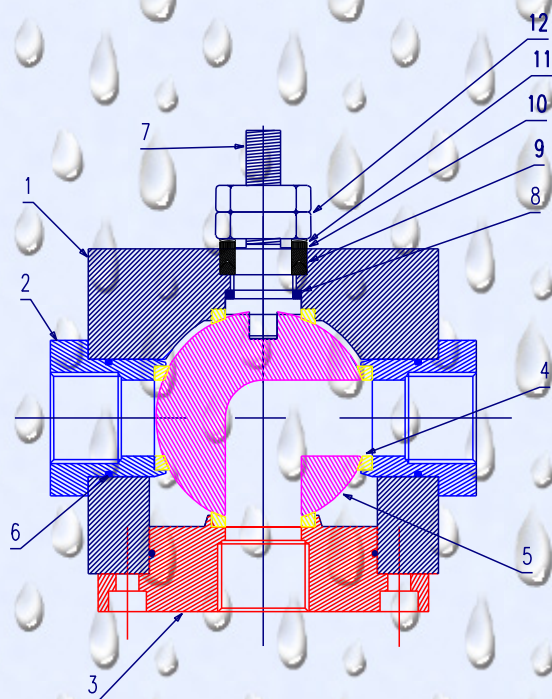

- 1 Corpo
- 2 Tappo laterale
- 3 Tappo inferiore
- 4 Sedi sfera
- 5 Sfera
- 6 Seggi corpo tappo
- 7 Perno
- 8 Tenuta inferiore perno
- 9 Tenuta pacco espansione
- 10 Rondella
- 11 Molla a tazza
- 12 Dadi

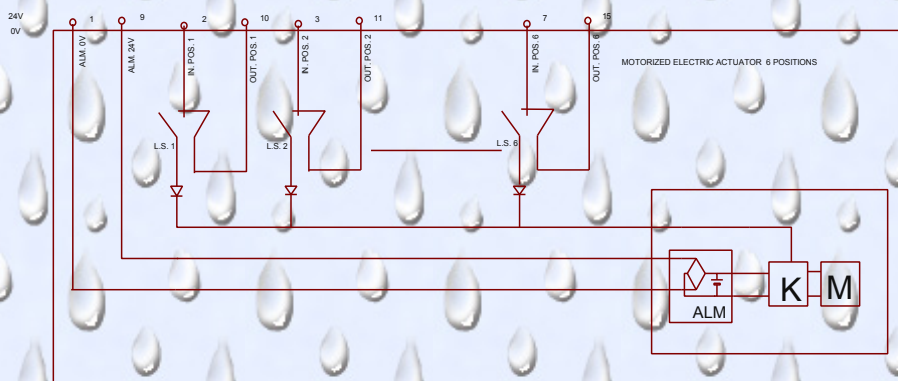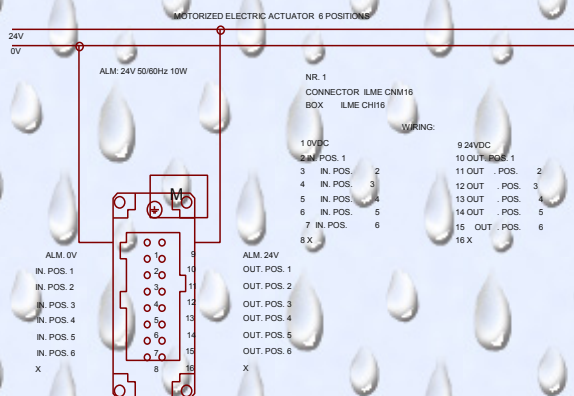

MOTOR:
INDIRECTIONAL (CLOCKWISE)
24V 10W
60°/5.3Sec.
360°/32Sec.

LIMIT SWITCH WORKING:
N.O. CONTACT TO STOP THE MOTOR (INTERNAL USE)
N.C. CONTACT FOR DIAGNOSTIC FUNCTION (EXTERNAL USE)
LIMIT SWITCH RELEASE=IN POSITION X

BEWARE:
DO NOT USE N.C. CONTACT LIMIT SWITCH (DIAGNOSTIC'S FOR EXTERNAL USE) TO STOP THE MOTOR.
THE INPUT POS. X MUST BE SAVED DURING THE ROTATION AND THE FOUND POSITION FUNCTIONS AS WELL.

N.B.
IF YOU DON'T NEED DIAGNOSTIC OUTPUT POSITION
WE CAN REDUCE THE CONNETTOR TO 10PIN.

